




Straight, High Ratio Boot

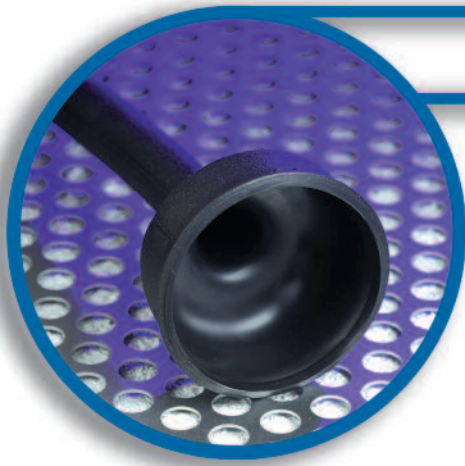

202D921 to 202D963 are straight, high ratio heat-shrinkable boots used with circular connectors and backshell adaptors to provide connector to cable strain relief. They are designed for applications where there is a high ratio between the adaptor and cable diameters and are available with a pre-coated adhesive to provide an effective environmental seal between the connector adaptor and the cable.

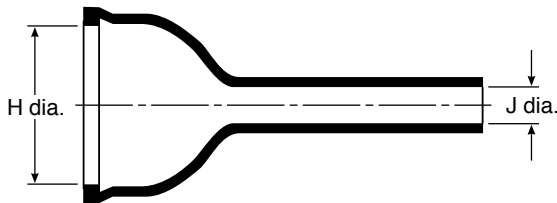

As supplied

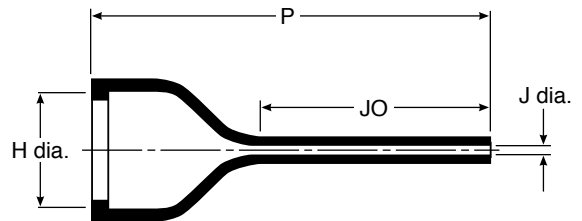

After unrestricted recovery

202D921 to 963 Straight, high ratio, lipped boot

Materials available

- 3 Semi-rigid modified polyolefin
- 4 Flexible modified polyolefin
- 12 Modified fluoro-elastomer (Viton)
- 25 Fluid resistant modified elastomer
- 100 Low fire-hazard, zero-halogen polyolefin

Table of dimensions (mm)

Dimensions apply to all materials unless otherwise indicated

	Expanded as supplied (min)				Recovered after heating (max)			
	H	J	J	J	H	J	P	JO
			-12	-100				
202D921	19.3	6.3	4.5	4.5	13.0	2.1	60.2	37.6
202D932	26.1	7.6	5.5	5.5	19.1	2.6	74.2	45.0
202D953	34.2	9.6	6.6	6.6	26.0	3.1	84.3	51.1
202D963	43.6	11.4	7.8	7.8	34.1	3.6	99.6	57.7

Coatings	Material	Recommended coatings:
	-25	/86 High temperature hot melt adhesive
		/225 Pre-coated curing adhesive
	-100	/180 Low fire-hazard hot melt adhesive
	-3, -50	/86 High temperature hot melt adhesive
	-3, -4	/42 General purpose hot melt adhesive
Modifications		Code
	Potting ports	-00

