

RNF-100

RNF-100 is a flexible, flame retarded, thin-wall heat-shrink tubing designed to provide excellent mechanical, thermal and fluid resistance. With its approval to many specifications, RNF-100 can be used in a variety of applications including military, commercial electronics and industrial.




Technical Characteristics

Continuous operating temperature	-55°C to +135°C
Minimum full recovery temperature	+121°C
Shrink ratio	2:1

Part Numbering Information

Part No	D (mm)	d (mm)	W (mm)
RNF-100 - 3/64 - Colour	1.2	0.6	0.45
RNF-100 - 1/16 - Colour	1.6	0.8	0.45
RNF-100 - 3/32 - Colour	2.4	1.2	0.50
RNF-100 - 1/8 - Colour	3.2	1.6	0.50
RNF-100 - 3/16 - Colour	4.8	2.4	0.50
RNF-100 - 1/4 - Colour	6.4	3.2	0.65
RNF-100 - 3/8 - Colour	9.5	4.8	0.65
RNF-100 - 1/2 - Colour	12.7	6.4	0.65
RNF-100 - 3/4 - Colour	19.1	9.5	0.75
RNF-100 - 1 - Colour	25.4	12.7	0.90
RNF-100 - 1-1/4 - Colour	31.8	15.9	0.95
RNF-100 - 1-1/2 - Colour	38.1	19.1	1.00
RNF-100 - 2 - Colour	50.8	25.4	1.15
RNF-100 - 3 - Colour	76.2	38.1	1.25
RNF-100 - 4 - Colour	101.6	50.8	1.40
RNF-100 - 5 - Colour	127.0	63.5	1.52

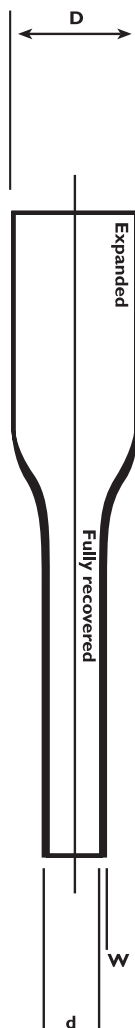

Availability

Standard colours: Black (0), White (9), Red (2), Blue (6), Yellow (4), Green (5), Clear (X)

Non-standard colours: Brown (1), Orange (3), Violet (7), Grey (8)

Specifications: UL E35586 600V, 125°C - (not clear product)
 CSA LR31929 600V, 125°C - (not clear product)
 Def Stan 59-97 Type 2B
 AMS-DTL-23053/5 Class 1 (colours), Class 2 (clear)
 BS 4G-198 Part 3 IIB
 VG 95343 Part 5 Type A and B
 VDE 0341/Pt 9005

