


# RNF-3000



RNF-3000 is a flexible premium grade 3:1 shrink ratio tubing that offers the same outstanding balance of properties as RNF-100. Its 3:1 shrink ratio allows for installation onto a wide range of substrate sizes and is ideal for strain relief between connectors and cables where a high shrink ratio is required. RNF-3000 is flame retarded and has excellent physical, chemical and electrical properties.

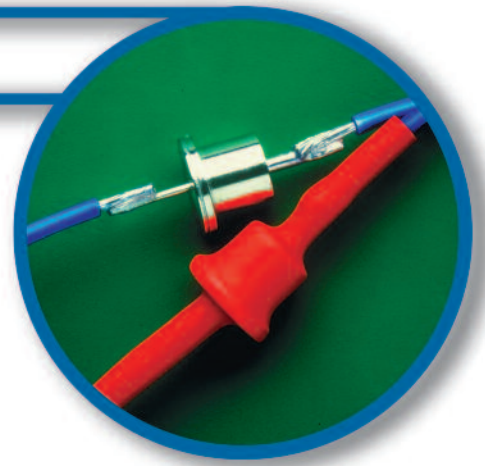

## Technical Characteristics

Continuous operating temperature	-55°C to +135°C
Minimum full recovery temperature	+120°C
Shrink ratio	3:1

## Part Numbering Information

Part No	D (mm)	d (mm)	W (mm)
RNF-3000 - 1.5/0.5 - Colour	1.5	0.5	0.45
RNF-3000 - 3/1 - Colour	3.0	1.0	0.55
RNF-3000 - 6/2 - Colour	6.0	2.0	0.65
RNF-3000 - 9/3 - Colour	9.0	3.0	0.75
RNF-3000 - 12/4 - Colour	12.0	4.0	0.75
RNF-3000 - 18/6 - Colour	18.0	6.0	0.85
RNF-3000 - 24/8 - Colour	24.0	8.0	1.00
RNF-3000 - 39/13 - Colour	39.0	13.0	1.15

## Availability

Standard colours: Black (0), White (9), Red (2), Blue (6), Yellow (4), Green (5), Clear (X)

Non-standard colours: Brown (1), Orange (3), Violet (7), Grey (8),

Specifications: UL E35586 600V, 125°C - (not clear product)  
CSA LR31929 600V, 125°C - (not clear product)  
Def Stan 59-97 Type 2B  
BS 4G-198 Part 3 IIB  
VG 95343 Part 5 Type A and B  
VDE 0341/Pt9005 Type A and B

